
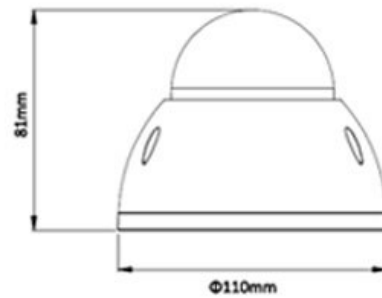


CP- UNC-VA20L3S**2 MP HD IP Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2Megapixel progressive scan CMOS
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm optional)
- Array Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VA20L3S

2 MP HD IP Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
S/N Ratio
Video Compression
Resolution
Frame Rate
Privacy Mask
ICR
Protocol
Ethernet
User Account
Smart Phone
IR
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2Megapixel progressive scan CMOS
0. 1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1s~1/100000s
Auto/Manual
3.6mm fixed lens (2.8mm optional)
Auto/Manual
BLC/ HLC/ DWDR
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
1080P(1920× 1080)/720P(1280× 720)/D1(704× 576/704× 480) /CIF(352× 288/352× 240)
Main Stream: 1080P(1 ~ 25/30fps),Sub Stream :D1(1 ~ 25/30fps)
Up to 4 areas
Auto(ICR)/Color/B/W
HTTP;TCP;ARP;RTSP;RTP;UDP;SMTP;FTP;DHCP;DNS;DDNS;IPv4/v6;QoS;UPnP;NTP, ONVIF, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4W(IR on)
IP67 & IK10
Φ110mm× 81mm
0.47kg