
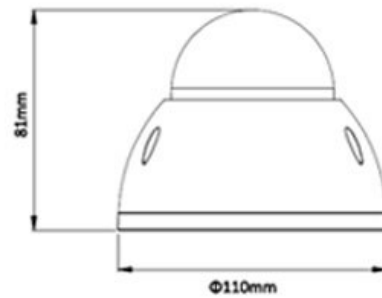


CP- UNC-VA40L3-M**4 MP Full HD IP IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4M,25/30fps@3M
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VA40L3-M

4 MP Full HD IP IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
Protocol
Ethernet
User Account
IR
Smart Phone
Ingress Protection
Operating Temperature
Power Source
Power Consumption
Dimension
Weight

Specification

1/3" 4MP Progressive scan CMOS
0. 1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
3.6mm(2.8mm optional)
Auto/Manual
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
BLC/ HLC/ DWDR
Main Stream: 4M(1 ~ 20fps)/3M(1 ~ 25/30fps),Sub Stream: D1(1 ~ 25/30fps)
4M(2688×1520)/3M(2304×1296)/1080P(1920×1080)/720P(1280×720)/ D1
(704×576/704×480) /CIF(352×288/352×240)
Up to 4 areas
IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS,
PPPOE, DDNS, FTP, IP Filter, QoS
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
IP67 & IK10
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4.7W(IR on)
Φ110mm × 81mm
0.33Kg(with package 0.47Kg)