


CP-VNC-V40FR3-MD**4 MP WDR VF IR Array Vandal Dome Camera - 30Mtr.****INDIGO****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4MP
- H.264 and MJPEG Triple-stream encoding
- WDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- 2.8~12mm Varifocal Lens
- IR Range of 30 Mtrs, Micro SD, IP66, IK10, PoE
- Mobile Software for Android, iOS
- CMS Software: IVMS

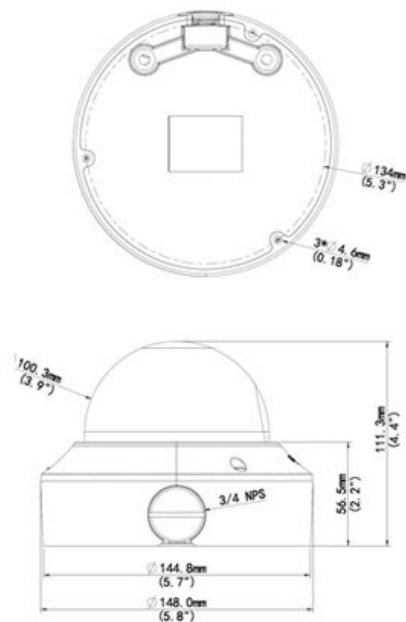

CP- VNC-V40FR3-MD

4 MP WDR VF IR Array Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Gain Control(AGC)
 Lens
 Video Compression
 S/N Ratio
 Video Streaming
 Resolution
 Video Output
 Frame Rate
 Privacy Mask
 ICR
 Audio Input
 Audio Output
 Alarm IN
 Alarm Out
 WDR
 Protocol
 Ethernet
 OSD
 IR
 Micro SD
 Operating Temperature
 Humidity
 Power Source
 Power Consumption
 Weatherproof Standard
 Dimension
 Weight

Specification

1/3" 4MP Progressive scan CMOS
 Colour: 0.03 Lux (F1.4, 50IRE), Black & White: 0.01Lux (F1.4, 50IRE)
 Auto/Manual, 1/6~1/8000 s
 Auto/Manual
 Auto/Manual
 2.8~12mm Varifocal Lens
 H.264/MJPEG
 >52dB
 Triple
 4MP@ 20fps
 1 BNC, impedance 75Ω; amplitude 1 V [p-p]
 4MP(2688×1520) @20fps, 1080P(1920×1080)/D1720×576 @ 25 fps
 Up to 4 areas
 IR-cut filter with auto switch (ICR)
 impedance 35 kΩ; amplitude 2 V [p-p]
 impedance 600 Ω; amplitude 2 V [p-p]
 1 IN
 1 Out
 Optical WDR (Upto 120dB)
 L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP,Qos,NTP,FTP,HTTP,SNMP,SIP,
 1 RJ45 10M/100M Base-TX Ethernet
 Up to 8 OSDs
 IR Range of 30 Mtr.
 Up to 128 GB
 -40°C ~ +60°C (-40°F ~ 140°F)
 ≤ 90% RH(non-condensing)
 12 V DC, or PoE (IEEE802.3 af)
 max.6.6 W (PoE :max.7.2 W)
 IP66 & IK10
 Ø148 x 111.3 mm (Ø5.8" x 4.4")
 0.75 kg